

SERVICE

SERVICE/UTILITY BODY SERIES



AMERICA'S FIRST NAME IN LIFTGATES™



G2 Dual Drive® - 1300 and 1600 lbs Capacity

Original Series™ - 1000, 1300 and 1600 lbs Capacity

G2 DUAL DRIVE® - 1300 AND 1600 LBS CAPACITY



THE NEXT GENERATION TOMMY LIFT®

The G² is a heavy-duty dual cylinder design liftgate which fits most service and utility body applications.

THE POWER FOR YOUR WORK TRUCK

Lifting Capacity - 1300 and 1600 lbs.

Dual hydraulic cylinders - one on each side of the platform - ensure a stable, even and smooth lift for your cargo.



TOMMY GATE ADVANTAGES

Loading - Streamlined uprights maximize the clear opening into the truck's bed.

Hitch - G² liftgates are compatible with many receiver-style trailer hitches.

Access - The liftgate platform can be "dropped-down" for direct access into the truck bed.

Maintenance - Hard chrome-plated lift arm pins and composite bushings reduce the need for maintenance.



THE PLATFORM YOU NEED

G2 Series liftgates are designed to offer large platforms without losing lifting capacity.

TREADPLATE STEEL		EXTRUDED ALUMINUM		STEEL BAR GRATING	TOMMY TRACTION
MODEL TP27	MODEL TP38	MODEL TP42	MODEL EA38	MODEL EA48	MODEL BG27
ONE PIECE PLATFORM 27" LOADING DEPTH 4" TAPER	TWO PIECE FOLDING PLATFORM 38" LOADING DEPTH 4" TAPER SHOWN BELOW	TWO PIECE FOLDING PLATFORM 42" LOADING DEPTH 7" TAPER	TWO PIECE FOLDING PLATFORM 38" LOADING DEPTH 6" TAPER	TWO PIECE FOLDING PLATFORM 48" LOADING DEPTH 6" TAPER	STEEL BAR GRATING PLATFORM; 27" LOADING DEPTH 4" TAPER
					MODEL TT27 TOMMY TRACTION (GRIPSTRUT™) PLATFORM 27" LOADING DEPTH 4" TAPER

DUAL CYLINDER DESIGN LIFTGATE

Each G2 series liftgate features a lockable platform latch (lock included).




Dual hydraulic cylinders lift the platform from both sides.

The cover can be removed with platform up or down.

License plate mount is recessed into the Main Frame Box.

The Main Frame Box contains the electrical & hydraulic systems.

- Full-size pump and motor unit.
- A Pressure Relief Valve helps prevent overloading the platform.
- Cylinder-mounted Flow Control Valves prevent rapid uncontrolled platform descent in the event of a hose failure.

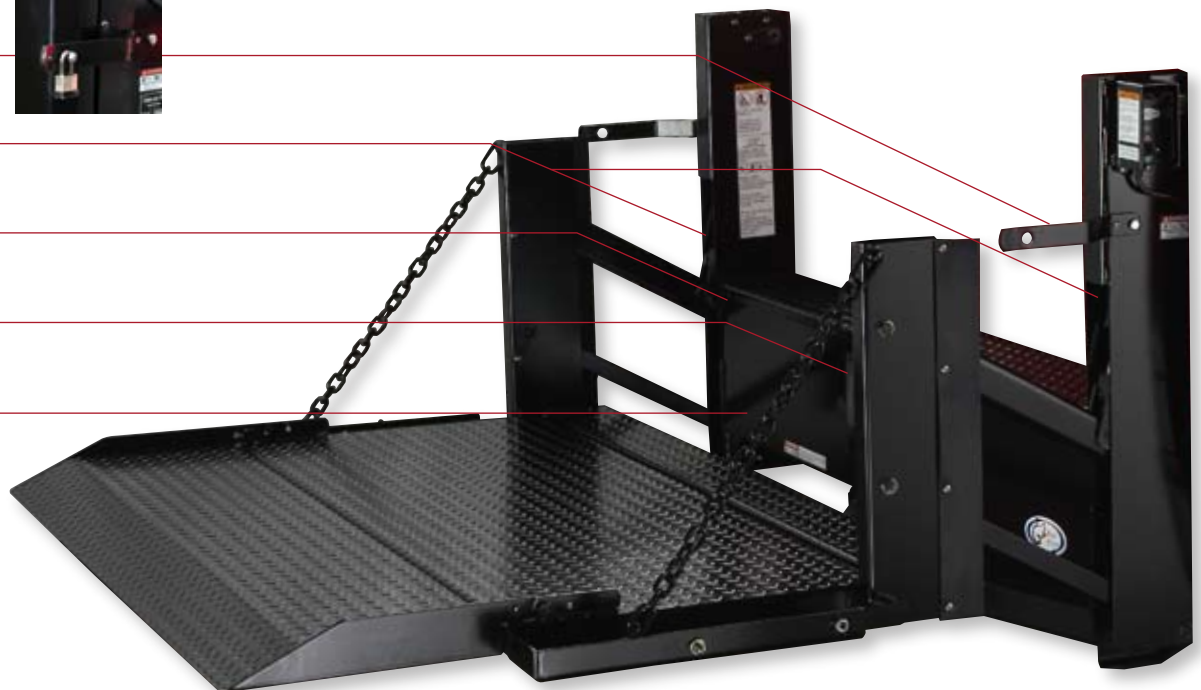

G2 DUAL DRIVE® SERIES SPECS

Model	Capacity (pounds)	Travel	Gate Width (outside uprights)	Clear Opening (inside uprights)	Platform Loadable Area (WxD)	Platform Taper	2 Piece Folding Platform	Application Code	Dual Cylinders	Platform Material	Gate Weight* (pounds)
G2-54-1340 TP27	1300	40	55	49	49 x 27	4	No	A	Yes	Treadplate	425
G2-54-1340 TP38	1300	40	55	49	49 x 38	4	Yes	A	Yes	Treadplate	475
G2-54-1340 TP42	1300	40	55	49	49 x 42	7	Yes	A	Yes	Treadplate	500
G2-54-1340 EA38	1300	40	55	49	49 x 38	6	Yes	A	Yes	Ext Alum	430
G2-54-1340 EA48**	1300	40	55	49	49 x 48	6	Yes	A	Yes	Ext Alum	460
G2-54-1640 TP27	1600	40	55	49	49 x 27	4	No	A	Yes	Treadplate	425
G2-54-1640 TP38	1600	40	55	49	49 x 38	4	Yes	A	Yes	Treadplate	475
G2-54-1640 TP42	1600	40	55	49	49 x 42	7	Yes	A	Yes	Treadplate	500
G2-54-1640 EA38	1600	40	55	49	49 x 38	6	Yes	A	Yes	Ext Alum	430
G2-54-1640 EA48**	1600	40	55	49	49 x 48	6	Yes	A	Yes	Ext Alum	460
G2-60-1340 TP27 SU	1300	40	61	55	55 x 27	4	No	B	Yes	Treadplate	450
G2-60-1340 TP38 SU	1300	40	61	55	55 x 38	4	Yes	B	Yes	Treadplate	500
G2-60-1340 TP42 SU	1300	40	61	55	55 x 42	7	Yes	B	Yes	Treadplate	525
G2-60-1340 EA38 SU	1300	40	61	55	55 x 38	6	Yes	B	Yes	Ext Alum	455
G2-60-1340 EA48 SU**	1300	40	61	55	55 x 48	6	Yes	B	Yes	Ext Alum	485
G2-60-1640 TP27 SU	1600	40	61	55	55 x 27	4	No	B	Yes	Treadplate	450
G2-60-1640 TP38 SU	1600	40	61	55	55 x 38	4	Yes	B	Yes	Treadplate	500
G2-60-1640 TP42 SU	1600	40	61	55	55 x 42	7	Yes	B	Yes	Treadplate	525
G2-60-1640 EA38 SU	1600	40	61	55	55 x 38	6	Yes	B	Yes	Ext Alum	455
G2-60-1640 EA48 SU**	1600	40	61	55	55 x 48	6	Yes	B	Yes	Ext Alum	485

APPLICATION CODES

Body Style	Body Opening	Bed Height (max)
A. Service/Utility Body	46" to 53"	40"
B. Service/Utility Body	54" to 61"	40"

Please provide body opening and bed height measurements when ordering.

* - Add 65 lbs for EA model shipping weight.

** - The EA48 platform extends 10" above liftgate uprights when closed

All measurements in inches, unless noted
WxD = Width x Depth

Warranty:

Tommy Gate's G2 dual drive liftgates have a warranty for two years from date of purchase.

TOMMY GATE®



www.tommygate.com

Video of liftgates in action!

Call 1-800-LIFTGATE for more information.

ORIGINAL SERIES - 1000, 1300 AND 1600 LBS CAPACITY

THE INDUSTRY LEADER SINCE 1965

The Tommy Gate Original Series hydraulic liftgate was developed in 1965 and continues to be a leader in quality and value.

THE POWER FOR YOUR WORK TRUCK

Lifting Capacity - 1000, 1300 and 1600 lbs.

TOMMY GATE ADVANTAGES

Hitch - Liftgates are compatible with many frame-mounted receiver-style trailer hitches.

Access - There are a range of widths to fit your truck body, to maximize the body's clear opening.

Travel - Original Series liftgate models (64SB) have a maximum vertical travel of up to 46 inches, to fit taller truck bodies.



THE PLATFORM YOU NEED

Many platform sizes and materials available for most trucks

TREADPLATE STEEL

MODEL TP	MODEL F11 TP	MODEL 64SB TP
ONE PIECE PLATFORM 27" LOADING DEPTH NO TAPER	TWO PIECE FOLDING PLATFORM 38" LOADING DEPTH 4" TAPER	ONE PIECE PLATFORM 36" LOADING DEPTH 6" TAPER

EXTRUDED ALUMINUM

MODEL F11 EA	MODEL 64SB EA
TWO PIECE FOLDING PLATFORM 39" LOADING DEPTH 6" TAPER	ONE PIECE PLATFORM 37" LOADING DEPTH 5" TAPER

STEEL BAR GRATING

MODEL 64SB BG
STEEL BAR GRATING PLATFORM 34" LOADING DEPTH 6" TAPER

TOMMY TRACTION

MODEL TT	MODEL 64SB TT
TOMMY TRACTION (GRIPSTRUT™) PLATFORM; 27" LOADING DEPTH NO TAPER	TOMMY TRACTION (GRIPSTRUT™) PLATFORM 34" LOADING DEPTH 6" TAPER

The cover can be removed with platform up or down.

The Main Frame Box contains the electrical & hydraulic systems.

- Full-size pump and motor unit.
- A Pressure Relief Valve helps prevent overloading the platform.
- Cylinder-mounted Flow Control Valves prevent rapid uncontrolled platform descent in the event of a hose failure.

A Torsion Bar is built into each F11 and 64SB platform to assist in closing the platform.



ORIGINAL SERIES™ SPECS

Model	Capacity (pounds)	Travel	Gate Width (outside uprights)	Clear Opening (inside uprights)	Platform Loadable Area (WxD)	Platform Taper	2 Piece Folding Platform	Application Code	Platform Material	Gate Weight* (pounds)
Model 54 (please note that the vertical travel is 40 inches)										
54-1040 TP	1000	40	55	52	52 x 27	None	No	B	Treadplate	335
54-1040 F11 TP	1000	40	55	52	52 x 38	4	Yes	B	Treadplate	385
54-1040 F11 EA	1000	40	55	52	49 x 39	6	Yes	B	Ext Alum	355
54-1340 TP	1300	40	55	52	52 x 27	None	No	B	Treadplate	365
54-1340 F11 TP	1300	40	55	52	52 x 38	4	Yes	B	Treadplate	410
54-1340 F11 EA	1300	40	55	52	49 x 39	6	Yes	B	Ext Alum	380
Model 48 (please note the vertical travel)										
48-1036 TP	1000	35	49	46	46 x 27	None	No	A	Treadplate	310
48-1036 F11 TP	1000	36	49	46	46 x 38	4	Yes	A	Treadplate	350
48-1036 F11 EA	1000	36	49	46	43 x 39	6	Yes	A	Ext Alum	335
Model 64SB (please note the vertical travel is 46 inches)										
64-1046 SB TP	1000	46	66	63	62 x 36	6	No	C	Treadplate	475
64-1046 SB EA	1000	46	66	63	60 x 37	5	No	C	Ext Alum	455
64-1346 SB TP	1300	46	66	63	62 x 36	6	No	C	Treadplate	475
64-1346 SB EA	1300	46	66	63	60 x 37	5	No	C	Ext Alum	455
64-1646 SB TP	1600	46	66	63	62 x 36	6	No	C	Treadplate	475
64-1646 SB EA	1600	46	66	63	60 x 37	5	No	C	Ext Alum	455

* - Add 65 lbs for EA model shipping weight.

APPLICATION CODES

Body Style	Body Opening	Bed Height (max)
A. Service/Utility Body	less than 48"	35" or 36"
B. Service/Utility Body	48" to 55"	40"
C. Service/Utility Body	56" to 61"	46"

Please provide body opening and bed height measurements when ordering.

All measurements in inches, unless noted
WxD = Width x Depth

Warranty:

Tommy Lift Original Series lifts have a one-year warranty from date of purchase. Pump and motor units have a two-year warranty.

TOMMY GATE®

Call 1-800-LIFTGATE for more information.



www.tommygate.com

Video of liftgates in action!

SERVICE AND UTILITY BODY SERIES

FEATURES

			ORIGINAL SERIES
	Liftgate brackets ensure a quick and proper installation.	✓	✓
	Curb-side Fixed Control: - Toggle style switch - Steel shield - Timer deactivates 90 seconds after last operation (helps prevent unauthorized use).	✓	✓
	150 Amp circuit breaker with manual reset helps protect the electrical system.	✓	✓
	Hard chrome lift arm pins and composite bushings are maintenance-free.	✓	
	The full-length molded ground and power cable provides a direct connection from the liftgate to the truck battery, ensuring solid electrical connections.	✓	✓








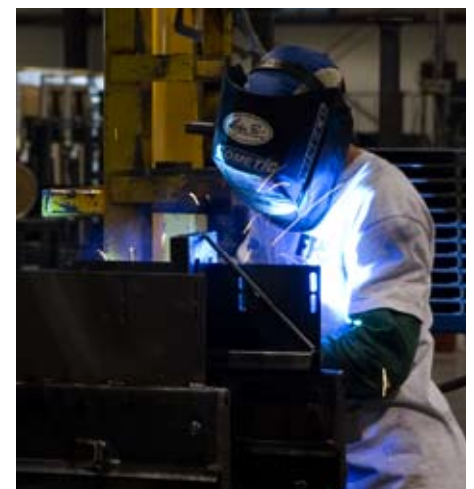
Tommy Gate's liftgates are compatible with many frame-mounted receiver-style trailer hitches.



The platform can be 'dropped' for easier dock and forklift loading, depending on bed height.

OPTIONS

	The Remote Pendant Control can be specified in addition to or in place of the standard Curb-side Fixed Control.	✓	✓
	Optional rubber platform bumpers provide a rubber cushion between the platform and the ground surface.	✓	✓
	Optional G2 Recessed Light Kit: 3-lights; works with 2 or 3 light systems.	✓	
	The optional Tire Rack can be mounted to one-piece platforms only & folds down when not in use.	✓	✓
	Optional light kit: A 2-light or 3-light add-on system (depending on model).		✓



Quality U.S. craftsmanship for over 40 years.

UTILITY

PLATFORM MATERIALS

		 ORIGINAL SERIES MODEL 48 & 54 MODEL 64SB		
	Treadplate Steel	✓	✓	✓
	Extruded Aluminum	✓	✓	✓
	Tommy Traction	✓	✓	✓
	Steel Bar Grating	✓		✓


EXTRUDED ALUMINUM PLATFORMS




EA38
 2-piece folding
 38" loading depth
 6" taper




EA48
 2-piece folding
 48" loading depth
 6" taper


TREADPLATE STEEL PLATFORMS




TP27
 1-piece
 27" loading depth
 4" taper





TP38
 2-piece folding
 38" loading depth
 4" taper




TP42
 2-piece folding
 42" loading depth
 7" taper

- Platforms are comprised of interlocking extrusions of 6061-T6 aircraft-quality aluminum.
- Double-walled construction for strength.
- Tongue and groove connections - no skip welding used.
- Aluminum resists weather-related corrosion (rust-resistant) - No painting required on the platform.
- A Torsion Bar (Closure-Assist) is built into each Aluminum platform to aid in platform closure.
- Aluminum Platforms are an ideal surface for placing company signage or advertising.





1210 Lincoln Way, Woodbine, IA 51579

1-800-LIFTGATE (1-800-543-8428)
(712) 647-2050 | Fax (712) 647-2417
info@tommygate.com

Corporate Office:
11010 N Tatum Blvd. Suite 100, Phoenix AZ 85028
(602) 955-2144 Fax: (602) 955-3902



www.tommygate.com

More photos!
Video of liftgates in action!

The latest news, specifications and
downloadable literature

Distributed By:

Warning: Tommy Lifts are industrial products for material handling only and are not to be used as a personnel or wheelchair lift. For safe handling and operating instructions, visit www.tommygate.com.

Caution: Before installing this Lift Gate, please observe the Vehicle Loading Limitations. These loading limitations are outlined in the Vehicle's Owner's Manual and the Safety Compliance Certification Label located on the driver's door pillar.

Note: Tommy Gate Company reserves the right to make changes in manufacturing to comply with current or new engineering specification changes where applicable.

Note: Lift Gate installers are to treat vehicles as incomplete and are therefore responsible for vehicle compliance with local, state and federal lighting regulations (FMVSS 108).



Every Tommy Gate liftgate is proudly made in Woodbine, Iowa


OUR HISTORY

In 1965, Delbert "Bus" Brown designed and built the first Tommy Lift hydraulic liftgate in his machine shop in Woodbine, Iowa. Named after his son, the TOMMY LIFT® original hydraulic liftgate was designed to help move heavy loads into and out of pickup trucks.



Still in Iowa after 40 years, Tommy Gate Company has a newly-expanded 150,000 square foot factory with a state-of-the-art production system that manufactures today's finest liftgates.

If you have any questions about your application, Tommy Gate liftgate features or options, please call our Customer Service department at the Woodbine Factory. They are available from 7 am to 5 pm CST Monday-Friday and can be reached at 1-800-LIFTGATE.



For more information and specifications on specific liftgate models, please see the separate sales literature for the various applications and models.



- Cargo Van & Sprinter Series



- Rail Gate Series



- Pickup Series



- Flatbed, Stake & Van/Lift N Dump